



K.L. Jack

INDUSTRIAL FASTENERS & SUPPLIES

***Rigging
Hardware
& Accessories***

SLINGS & STRAPS

WIRE ROPE & FITTINGS

HOISTS

**TRANSPORT CHAINS
& HOOKS**

SHACKLES

EYEBOLTS

TURNBUCKLES

FORGED FITTINGS

AUBURN • BANGOR • GARDINER • GORHAM • PORTLAND • MANCHESTER, NH

SLINGS & STRAPS

CHOKER HITCH



The sling is passed around the load and through one eye. The remaining eye is engaged to the hook. Note that the angle of choke can result in a reduction to the rated capacity for that operation.

BASKET HITCH

The sling surrounds the load while each eye is engaged to the hook (or hooks) above. Note that a basket hitch can be used in either a single or double hook configuration.

VERTICAL HITCH

One eye is engaged directly to the load while the other eye is engaged to the hook.

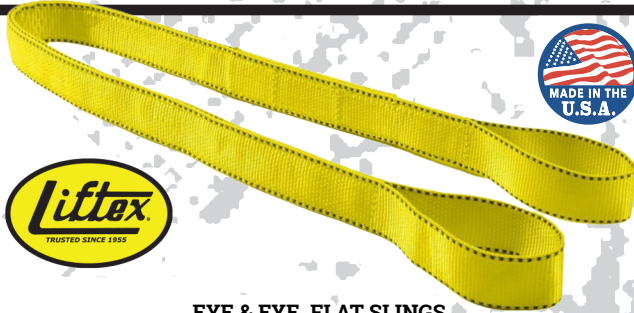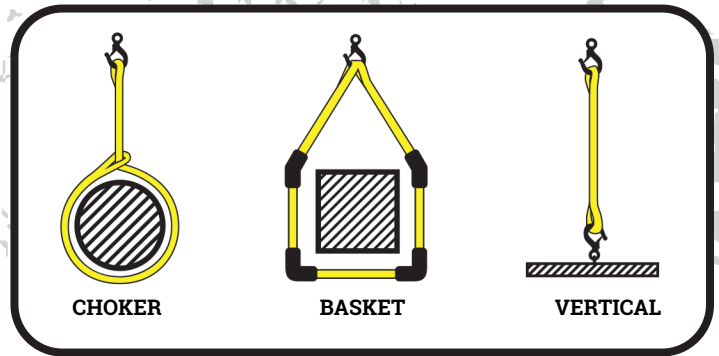

PRO-EDGE®
Tougher. Stronger. Better.™

BY LIFTEX

EYE & EYE FLAT SLINGS

FLAT LOOP POLYESTER • 5:1 SAFETY DESIGN FACTOR

PART NO.	LEN.	WIDTH	WORKING LOAD LIMITS		
			BASKET	VERTICAL	CHOKER
EE291PDX2	2'	1"	6,400 lbs	3,200 lbs	2,560 lbs
EE291PDX3	3'	1"	6,400 lbs	3,200 lbs	2,560 lbs
EE291PDX4	4'	1"	6,400 lbs	3,200 lbs	2,560 lbs
EE291PDX6	6'	1"	6,400 lbs	3,200 lbs	2,560 lbs
EE291PDX8	8'	1"	6,400 lbs	3,200 lbs	2,560 lbs
EE291PDX10	10'	1"	6,400 lbs	3,200 lbs	2,560 lbs
2NLAS	2'	2"	12,800 lbs	6,400 lbs	5,120 lbs
3NLAS	3'	2"	12,800 lbs	6,400 lbs	5,120 lbs
4NLAS	4'	2"	12,800 lbs	6,400 lbs	5,120 lbs
6NLAS	6'	2"	12,800 lbs	6,400 lbs	5,120 lbs
8NLAS	8'	2"	12,800 lbs	6,400 lbs	5,120 lbs
10NLAS	10'	2"	12,800 lbs	6,400 lbs	5,120 lbs
12NLAS	12'	2"	12,800 lbs	6,400 lbs	5,120 lbs
16NLAS	16'	2"	12,800 lbs	6,400 lbs	5,120 lbs
20NLAS	20'	2"	12,800 lbs	6,400 lbs	5,120 lbs
24NLAS	24'	2"	12,800 lbs	6,400 lbs	5,120 lbs

EYE & EYE FLAT SLINGS

PRO-EDGE, A VERSATILE GENERAL PURPOSE POLYESTER FLAT SLING WITH EDGE PROTECTION

Liftex Eye & Eye Pro-Edge® Premium Flat Polyester Web Slings are fabricated with Pro-Edge® polyester webbing. Pro-Edge® features edge reinforcement with twisted tire cord yarns that provide maximum resistance to wear from cutting and abrasion. Each sling features a Laser Printed PVC Pocket Tag for easy Identification of Sling Size and WLL Ratings.


Type III Eye & Eye Flat Web slings are made with a flat loop eye on each end with loop eye opening on same plane as the sling body. Versatile and flexible, this sling can be used in all three hitches (vertical, basket and choker).

Polyester web slings have limited stretch under load to minimize bounce and help maintain control when lifting. These polyester slings are resistant to acids and bleach and have soft, flexible surfaces that won't easily scratch or mar sensitive loads.

LIFTEX PRO-EDGE - SUPERIOR SLING CONSTRUCTION

Liftex RED indicator core yarns assist in determining sling wear or damage during inspection.

Visible RED core yarn is a removal from service indicator.

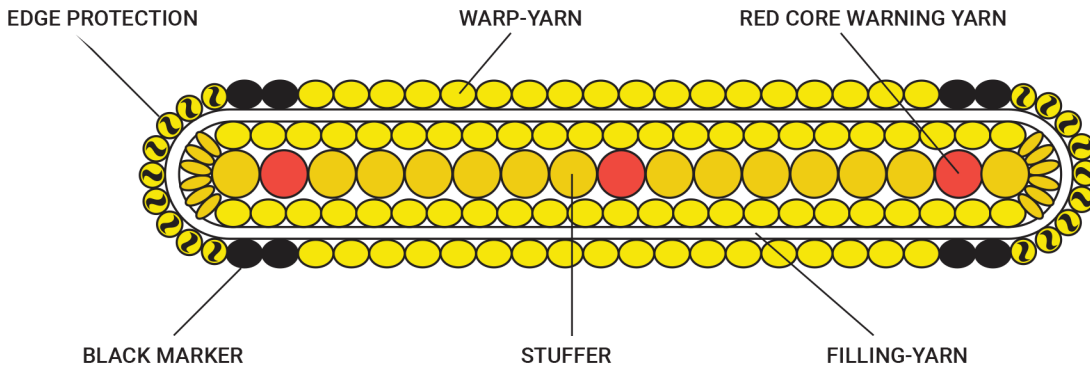


SEE PG. 5 FOR GENERAL REMOVAL FROM SERVICE CRITERIA FOR WEB SLINGS

LIFTEX • PRO-EDGE

2" X 24" SLING PROTECTION SLEEVE FOR 2" WIDE FLAT SLINGS

2' SLS2HPX2

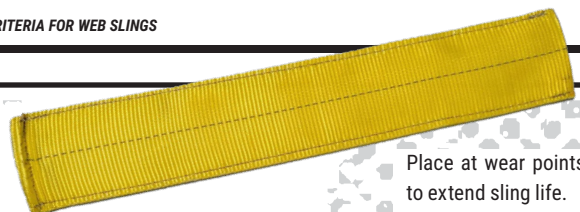

Place at wear points to extend sling life.

SLINGS & STRAPS



ENDLESS ROUND SLINGS

LIFTEX® ENDLESS ROUND SLINGS MAY BE USED IN A VERTICAL, CHOKER OR BASKET TYPE HITCH.

Liftex® RoundUp™ RoundSlings offer the user the ultimate in lifting security and rigging ease. RoundUp™ RoundSlings are constructed from a continuous loop of 100% polyester fiber. Each RoundUp™ RoundSling is covered with a double polyester woven jacket to protect the load-bearing fibers from damage. Because the load-bearing fibers never come in contact with the load, they are protected from some abrasions and ultraviolet degradation. Each sling has a tough, resilient tag for quick and easy identification of Sling Size and WLL Ratings.



ENDLESS POLYESTER ROUND SLINGS

DOUBLE WOVEN POLYESTER JACKET

PART NO.	LEN.	DIA.	WORKING LOAD LIMITS		
			BASKET	VERTICAL	CHOKER
ENR2X4	4'	7/8"	10,600 lbs	5,300 lbs	4,200 lbs
ENR2X6	6'	7/8"	10,600 lbs	5,300 lbs	4,200 lbs
ENR2X8	8'	7/8"	10,600 lbs	5,300 lbs	4,200 lbs
ENR2X10	10'	7/8"	10,600 lbs	5,300 lbs	4,200 lbs
ENR2X12	12'	7/8"	10,600 lbs	5,300 lbs	4,200 lbs
ENR2X16	16'	7/8"	10,600 lbs	5,300 lbs	4,200 lbs
ENR2X20	20'	7/8"	10,600 lbs	5,300 lbs	4,200 lbs

LIFTEX ROUNDUP ROUNDSLING FEATURES

- Double Jacket construction protects load-bearing core from some abrasion and ultraviolet degradation.
- Core Yarns Carry 100% of Load.
- There is no reduction in capacity from surface abrasion.
- Laser Printed PVC Pocket Tag displays Sling Size and WLL Ratings.

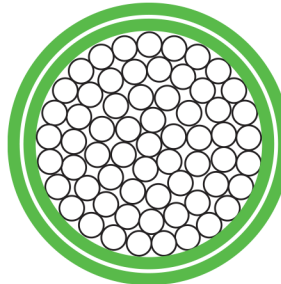

WARNING

SLING FAILURE CAN CAUSE
DEATH OR INJURY
SLING FAILURE RESULTS FROM
MISUSE, DAMAGE, AND
EXCESSIVE WEAR

ADHERE TO INDUSTRY
STANDARDS & REGULATIONS

SEE PG. 5 FOR GENERAL REMOVAL FROM SERVICE CRITERIA FOR ROUND SLINGS

RATCHET STRAPS & TIE DOWNS



**RATCHET TIE DOWN
FLAT HOOKS**

2" X 27 FT



**RATCHET TIE DOWN
FINGER HOOKS**

2" X 27 FT



**RATCHET STRAPS
OPEN HOOKS**

1" X 16 FT

RATCHET TIE DOWNS

2" X 27 FT

PART NO.	HOOK STYLE	BREAKING STRENGTH	WORKING LOAD LIMIT
2X27FHK	FLAT	10,000 lbs	3,300 lbs
2X27WHK	FINGER	10,000 lbs	3,300 lbs

RATCHET STRAPS

1" X 16 FT

PART NO.	HOOK STYLE	BREAKING STRENGTH	WORKING LOAD LIMIT
LA60103	OPEN	1,200 lbs	400 lbs

WIRE & FITTINGS




100' CABLE/WIRE ROPE



WIRE ROPE CLIPS



WIRE ROPE THIMBLES



CABLE SWAGE SLEEVES



CABLE SWAGE STOPS



QUICK LINKS

AIRCRAFT CABLE & WIRE ROPE

100' FT. SPOOLS - GALVANIZED

PART NO.	DIAMETER	CONSTRUCTION	W.L.L.
6RGAC	1/16"	7 x 7	96 lbs
9RGAC	3/32"	7 x 19	200 lbs
12RGAC	1/8"	7 x 19	400 lbs
15RGAC	5/32"	7 x 19	560 lbs
18RGAC	3/16"	7 x 19	840 lbs
25RGAC	1/4"	7 x 19	1,400 lbs
31RGAC	5/16"	7 x 19	1,960 lbs
37RGAC	3/8"	7 x 19	2,880 lbs
50RGAC	1/2"	6 x 25 IWRC	4,800 lbs
62RGAC	5/8"	6 x 25 IWRC	7,400 lbs

304 STAINLESS

PART NO.	DIAMETER	CONSTRUCTION	W.L.L.
6RSAC	1/16"	7 x 7	96 lbs
9RSAC	3/32"	7 x 19	200 lbs
12RSAC	1/8"	7 x 19	352 lbs
18RSAC	3/16"	7 x 19	740 lbs
25RSAC	1/4"	7 x 19	1,280 lbs
31RSAC	5/16"	7 x 19	1,800 lbs
37RSAC	3/8"	7 x 19	2,400 lbs

*WORKING LOAD LIMIT IS BASED ON A DESIGN FACTOR OF 5:1 **NOT FOR AIRCRAFT USE

WIRE ROPE CLIPS

ZINC PLATED

PART NO.	DIAMETER
6RCRDZ	1/16"
12RCRDZ	1/8"
18RCRDZ	3/16"
25RCRDZ	1/4"
31RCRDZ	5/16"
37RCRDZ	3/8"
43RCRDZ	7/16"
50RCRDZ	1/2"
56RCRDZ	9/16"
62RCRDZ	5/16"
75RCRDZ	3/4"
87RCRDZ	7/8"

STAINLESS STEEL

PART NO.	DIAMETER
6RCRDS	1/16"
12RCRDS	1/8"
18RCRDS	3/16"
25RCRDS	1/4"
31RCRDS	5/16"
37RCRDS	3/8"

HEAVY DUTY WIRE ROPE CLIPS

HOT-DIP GALVANIZED

PART NO.	DIAMETER
18RCHDG	3/16"
25RCHDG	1/4"
31RCHDG	5/16"
37RCHDG	3/8"
43RCHDG	7/16"
50RCHDG	1/2"
62RCHDG	5/8"
75RCHDG	3/4"
87RCHDG	7/8"
100RCHDG	1"

WIRE ROPE THIMBLES

ZINC PLATED

PART NO.	DIAMETER
12RTRDZ	1/8"
18RTRDZ	3/16"
25RTRDZ	1/4"
31RTRDZ	5/16"
37RTRDZ	3/8"
50RTRDZ	1/2"
62RTRDZ	5/8"

HEAVY DUTY WIRE ROPE THIMBLES

HOT-DIP GALVANIZED

PART NO.	DIAMETER
25RTHDG	1/4"
31RTHDG	5/16"
37RTHDG	3/8"
50RTHDG	1/2"
62RTHDG	5/8"
75RTHDG	3/4"
87RTHDG	7/8"
100RTHDG	1"

STAINLESS STEEL

PART NO.	DIAMETER
12RTRDS	1/8"
18RTRDS	3/16"
25RTRDS	1/4"
37RTRDS	3/8"

CABLE SWAGE SLEEVES

ALUMINUM • 100 PER BOX

PART NO.	DIAMETER
6RSSS	1/16"
9RSSS	3/32"
12RSSS	1/8"
15RSSS	5/32"
18RSSS	3/16"
25RSSS	1/4"

CABLE SWAGE STOPS

ALUMINUM

PART NO.	DIA.	BOX QTY.
6RSST	1/16"	100
9RSST	3/32"	100
12RSST	1/8"	100
15RSST	5/32"	100
18RSST	3/16"	100
25RSST	1/4"	25

QUICK LINKS

ZINC PLATED

PART NO.	DIAMETER
12RLQLZ	1/8"
18RLQLZ	3/16"
25RLQLZ	1/4"
31RLQLZ	5/16"
37RLQLZ	3/8"
50RLQLZ	1/2"

STAINLESS STEEL

PART NO.	DIAMETER
18RLQLS	3/16"
25RLQLS	1/4"
31RLQLS	5/16"
37RLQLS	3/8"

WIRE ROPE & CABLE TOOLS



HAND SWAGERS



WIRE ROPE/CABLE CUTTERS

HAND SWAGERS

FOR OVAL SLEEVES

PART NO.	LENGTH	CAPACITY	CLAMP OPENING
22-ST14C-3*	14"	Up to 1/8" Sleeves	1/8"
22-ST24C-3	24"	Up to 3/16" Sleeves	7/32"
22-ST30C-3	30"	Up to 5/16" Sleeves	5/16"

WIRE ROPE/CABLE CUTTERS

PART NO.	LENGTH	MAX. CAPACITY	CLAMP OPENING
22-WC16-3	28"	5/8" Wire Rope	1"

HOISTS & LIFTING ACCESSORIES



**LEVER
HOISTS**



**MANUAL
CHAIN HOISTS**



**BEAM
CLAMP**

JET

LEVER CHAIN HOISTS 15 FT LIFT

PART NO.	CAPACITY
JLP-050A-15	1/2 Ton
JLP-075A-15	3/4 Ton
JLP-150A-15	1-1/2 Ton

MANUAL CHAIN HOISTS 20 FT LIFT

PART NO.	CAPACITY
S90-100-20	1 Ton
S90-150-20	1-1/2 Ton
S90-50-20	1/2 Ton

2-TON HEAVY DUTY BEAM CLAMP

ATTACHES TO BEAM FLANGE FOR SUSPENDING LOADS


PART NO.	CAPACITY	MAX FLANGE WIDTH
JBC-2	2 Ton	8-2/3"



**CABLE WINCH
HOISTS**



LUGALL® CABLE RATCHET WINCH HOISTS

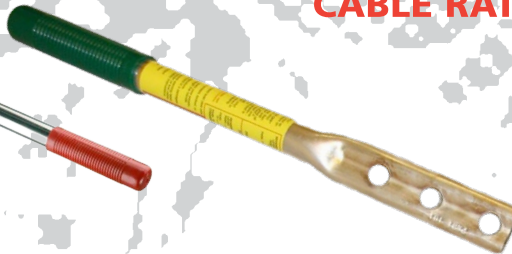

**REPLACEMENT
HANDLES**



**HOOK LATCH
REPAIR KIT**

CABLE WINCH HOISTS

PART NO.	SINGLE LINE CAP. x LENGTH	DOUBLE LINE CAP. x LENGTH	MAX. CAPACITY
CH1500-25	750 lbs / 25 ft	1,500 lbs / 12'6"	3/4 Ton
CH3000-30	1,500 lbs / 30 ft	3,000 lbs / 15 ft	1-1/2 Ton
CH4000-20	2,000 lbs / 20'	4,000 lbs / 10 ft	2 Ton

REPLACEMENT HANDLES

PART NO.	MODEL COMPATABILITY	CAPACITY
CH101	CH1500-25	3/4 Ton
CH211	CH3000-30	1-1/2 Ton
CH198	CH4000-20	2 Ton

HOOK LATCH REPAIR KIT

PART NO.	MODEL COMPATABILITY
CH263	CH1500-25, CH3000-30, CH4000-20



GENERAL REMOVAL FROM SERVICE CRITERIA FOR FLAT WEB AND ROUND SLINGS

- A Web Sling or Round Sling shall be removed from service if any of the following are visible:
- Missing or illegible identification tag
 - Acid or caustic burns
 - Evidence of heat damage
 - Melting, charring or weld spatters are present on any part of the sling
 - Holes, tears, cuts, snags or embedded articles
 - Broken or worn stitching in the cover which exposes core fibers and/or broken or damaged core yarn (Round Slings)
 - Excessive abrasive wear
 - Knots in any part of the sling
 - Discoloration, brittle or stiff areas on any part of the sling, which may indicate chemical, heat, or ultraviolet/sunlight damage
 - Other conditions and/or visible damage that cause doubt as to the continued use of the sling



**SCAN FOR SLING
INSPECTION FORM**

FORGED FITTINGS

HOOKS - GRADE 70



**GRAB
HOOK**



**SLIP
HOOK**



**SLIP HOOK
WITH LATCH**



**GRAB HOOK
WELD ON**



**SAFETY CHAIN
CONNECTOR**

WARNING: GRADE 70 HOOKS ARE NOT RATED FOR OVERHEAD LIFTING

CLEVIS GRAB HOOK YELLOW ZINC - GRADE 70

PART NO.	BREAKING STRENGTH	WORKING LOAD LIMIT	SIZE
25NHCG/70	18,400 lbs	4,600 lbs	1/4"
31NHCG/70	21,600 lbs	5,400 lbs	5/16"
37NHCG/70	30,000 lbs	7,500 lbs	3/8"
50NHCG/70	51,000 lbs	12,750 lbs	1/2"

CLEVIS SLIP HOOK YELLOW ZINC - GRADE 70

PART NO.	BREAKING STRENGTH	WORKING LOAD LIMIT	SIZE
25NHSC/70	11,000 lbs	2,750 lbs	1/4"
31NHSC/70	17,200 lbs	4,300 lbs	5/16"
37NHSC/70	21,000 lbs	5,250 lbs	3/8"
50NHSC/70	36,000 lbs	9,000 lbs	1/2"

CLEVIS SLIP HOOK WITH LATCH YELLOW ZINC - GRADE 70

PART NO.	BREAKING STRENGTH	WORKING LOAD LIMIT	SIZE
31NHSL/70	17,200 lbs	4,300 lbs	5/16"
37NHSL/70	21,000 lbs	5,250 lbs	3/8"
50NHSL/70	36,000 lbs	9,000 lbs	1/2"

GRAB HOOK - WELD ON GRADE 70

PART NO.	BREAKING STRENGTH	WORKING LOAD LIMIT	SIZE
37NWC	26,400 lbs	6,600 lbs	3/8"

SAFETY CHAIN CONNECTOR GRADE 100

PART NO.	BREAKING STRENGTH	WORKING LOAD LIMIT	SIZE
37NHL100	35,200 lb	8,800 lb	3/8"

CHAIN & CHAIN ACCESSORIES



**20 FT TRANSPORT CHAINS
WITH 2 HOOKS GR.70**



**RATCHET STYLE
CHAIN LOAD BINDER**



**SCREW PIN
ANCHOR SHACKLES**

WE STOCK DOMESTIC AND IMPORTED BRAND SHACKLES

TRANSPORT CHAIN WITH GRAB HOOKS GRADE 70 - 20 FT LENGTHS

PART NO.	CHAIN SIZE	BREAKING STRENGTH	W.L.L.
31R20CTC	5/16"	18,800 lbs.	4,700 lbs.
37R20CTC	3/8"	26,400 lbs.	6,600 lbs.

RATCHET STYLE CHAIN LOAD BINDER GRADE 70

PART NO.	FITS CHAIN SIZES	WORKING LOAD LIMIT
LOAD BINDER	5/16" - 3/8"	6,600 lbs.

SCREW PIN ANCHOR SHACKLES HOT-DIP GALVANIZED - IMPORTED

PART NO.	SIZE (BAIL DIAMETER)	WORKING LOAD LIMIT	THROAT OPENING	PIN DIAMETER
25RSSPG/I	1/4"	1,000 lbs	15/32"	5/16"
31RSSPG/I	5/16"	1,500 lbs	17/32"	7/16"
37RSSPG/I	3/8"	2,000 lbs	21/32"	7/16"
50RSSPG/I	1/2"	4,000 lbs	13/16"	5/8"
62RSSPG/I	5/8"	6,500 lbs	1-1/16"	3/4"
75RSSPG/I	3/4"	9,500 lbs	1-1/4"	7/8"

SCREW PIN ANCHOR SHACKLES HOT-DIP GALVANIZED - MADE IN THE USA


PART NO.	*SIZE	WORKING LOAD LIMIT	THROAT OPENING	PIN DIAMETER
18RSSPG	3/16"	650 lbs	3/8"	1/4"
25RSSPG	1/4"	1,000 lbs	15/32"	5/16"
31RSSPG	5/16"	1,500 lbs	17/32"	7/16"
37RSSPG	3/8"	2,000 lbs	21/32"	7/16"
43RSSPG	7/16"	3,000 lbs	23/32"	1/2"
50RSSPG	1/2"	4,000 lbs	13/16"	5/8"
62RSSPG	5/8"	6,500 lbs	1-1/16"	3/4"
75RSSPG	3/4"	9,500 lbs	1-1/4"	7/8"
87RSSPG	7/8"	13,000 lbs	1-7/16"	1"
100RSSPG	1"	17,000 lbs	1-11/16"	1-1/8"
112RSSPG	1-1/8"	19,000 lbs	1-13/16"	1-1/4"
125RSSPG	1-1/4"	24,000 lbs	2"	1-3/8"
150RSSPG	1-1/2"	34,000 lbs	2-3/8"	1-5/8"

* SIZE SHOWN INDICATES DIAMETER AT TOP OF SHACKLE BODY (BAIL DIAMETER)

** SHACKLE SIZE MATCHES CHAIN SIZE. FOR ADDITIONAL CONNECTION STRENGTH IT IS POSSIBLE TO GO ONE SHACKLE SIZE LARGER THAN THE CHAIN IN MOST APPLICATIONS.

FORGED FITTINGS

MACHINERY EYES, TURNBUCKLES, EYE BOLTS, EYE NUTS & GENERAL

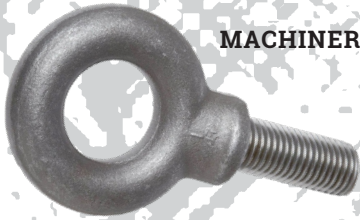

SHOULDER MACHINERY LIFTING EYE BOLTS

METRIC SIZES IN STOCK



JAW & JAW TURNBUCKLES

SHOULDER MACHINERY EYE BOLTS			
PLAIN FINISH - MADE IN THE USA			
PART NO.	THREAD SIZE x SHANK LENGTH (UNDER SHOULDER)	W.L.L. (STRAIGHT PULL)	OAL
25CBMS	1/4"-20 x 1"	500 lbs	2-3/8"
31CBMS	5/16"-18 x 1-1/8"	900 lbs	2-3/4"
37CBMS	3/8"-16 x 1-1/4"	1,400 lbs	3-1/4"
43CBMS	7/16"-14 x 1-3/8"	2,000 lbs	3-5/8"
50CBMS	1/2"-13 x 1-1/2"	2,600 lbs	4"
56CBMS	9/16"-12 x 1-5/8"	3,200 lbs	4-1/2"
62CBMS	5/8"-11 x 1-3/4"	4,000 lbs	4-7/8"
75CBMS	3/4"-10 x 2"	6,000 lbs	5-1/4"
87CBMS	7/8"-9 x 2-1/4"	7,000 lbs	6"
100CBMS	1"-8 x 2-1/2"	9,000 lbs	7"
112CBMS	1-1/8"-7 x 2-3/4"	12,000 lbs	7-1/2"
125CBMS	1-1/4"-7 x 3"	15,000 lbs	8-1/2"
150CBMS	1-1/2"-6 x 3-1/2"	21,000 lbs	9-1/2"
IMPORTED			
PART NO.	THREAD SIZE x SHANK LENGTH (UNDER SHOULDER)	W.L.L. (STRAIGHT PULL)	OAL
50CBMS/I	1/2"-13 x 1-1/2"	2,600 lbs	4"
62CBMS/I	5/8"-11 x 1-3/4"	4,000 lbs	4-1/2"

ANY INFORMATION SUPPLIED IS STRICTLY FOR REFERENCE.

JAW & JAW TURNBUCKLES		
HOT-DIP GALVANIZED - 5:1 SAFETY FACTOR		
PART NO.	DIAMETER x TAKE UP	W.L.L.
25N400TJGG	1/4" x 4"	500 lb
31N450TJGG	5/16" x 4-1/2"	800 lb
37N600TJGG	3/8" x 6"	1,200 lb
50N600TJGG	1/2" x 6"	2,200 lb
50N900TJGG	1/2" x 9"	2,200 lb
50N1200TJGG	1/2" x 12"	2,200 lb
62N600TJGG	5/8" x 6"	3,500 lb
62N1200TJGG	5/8" x 12"	3,500 lb
75N600TJGG	3/4" x 6"	5,200 lb
75N1200TJGG	3/4" x 12"	5,200 lb
75N1800TJGG	3/4" x 18"	5,200 lb
87N1200TJGG	7/8" x 12"	7,200 lb
100N600TJGG	1" x 6"	10,000 lb
100N1200TJGG	1" x 12"	10,000 lb
100N1800TJGG	1" x 18"	10,000 lb
150N1800TJGG	1-1/2" x 18"	21,400 lb



SHOULDERED EYE BOLT



REGULAR EYE BOLT



FORGED EYE NUT



DROP FORGED PAD EYE

SHOULDER EYE BOLT		
HOT-DIP GALVANIZED - MADE IN THE USA		
PART NO.	DIAMETER	SHANK LENGTH
25C200BFSG	1/4"	2"
25C400BFSG	1/4"	4"
31C225BFSG	5/16"	2-1/4"
37C250BFSG	3/8"	2-1/2"
37C450BFSG	3/8"	4-1/2"
50C325BFSG	1/2"	3-1/4"
50C600BFSG	1/2"	6"
62C450BFSG	5/8"	4-1/2"
62C600BFSG	5/8"	6"
75C450BFSG	3/4"	4-1/2"
75C600BFSG	3/4"	6"
87C500BFSG	7/8"	5"

NOTE: HOT DIP GALVANIZED EYEBOLTS WITH HEX NUT ATTACHED.

REGULAR EYE BOLT		
NO SHOULDER • HOT-DIP GALVANIZED MADE IN THE USA		
PART NO.	DIAMETER	SHANK LENGTH
25C300BFEG	1/4"	3"
25C600BFEG	1/4"	6"
37C600BFEG	3/8"	6"
37C800BFEG	3/8"	8"

REGULAR EYE BOLT (cont.)		
NO SHOULDER • HOT-DIP GALVANIZED MADE IN THE USA		
PART NO.	DIAMETER	SHANK LENGTH
50C800BFEG	1/2"	8"
50C1000BFEG	1/2"	10"
50C1200BFEG	1/2"	12"
62C800BFEG	5/8"	8"
62C1000BFEG	5/8"	10"
62C1200BFEG	5/8"	12"
62C1500BFEG	5/8"	15"
75C800BFEG	3/4"	8"
75C1000BFEG	3/4"	10"
75C1200BFEG	3/4"	12"
75C1500BFEG	3/4"	15"
75C1800BFEG	3/4"	18"
75C2400BFEG	3/4"	24"
87C1200BFEG	7/8"	12"
100C900BFEG	1"	9"
100C1200BFEG	1"	12"
100C1800BFEG	1"	18"
100C2400BFEG	1"	24"
150C1200BFEG	1-1/2"	12"

FORGED EYE NUT	
LOW CARBON • HOT-DIP GALVANIZED MADE IN THE USA	
PART NO.	THREAD SIZE
25CNENG	1/4"-20
31CNENG	5/16"-18
37CNENG	3/8"-16
50CNENG	1/2"-13
62CNENG	5/8"-11
75CNENG	3/4"-10
87CNENG	7/8"-9
100CNENG	1"-8
125CNENG	1-1/4"-7

DROP FORGED PAD EYE		
FOR WELDING LIFT POINTS - PLAIN FINISH		
PART NO.	EYE I.D.	SHOULDER O.D.
ONEPE	1/4"	5/8"
2NEPE	3/4"	1-1/16"
4NEPE	1"	1-7/16"
5NEPE	1-1/4"	2"

FOR FULL SPECIFICATIONS AND DIMENSIONAL INFORMATION VISIT WWW.KLJACK.COM

DON'T FORGET

***Safety
First***

**PROTECT
YOUR
HEAD**




**BE
SEEN**



AND BE SAFE

**SHOP SAFETY AT
KLJACK.COM**



@KLJackUSA   

SHOP ONLINE at
KLJack.com

145 Warren Ave
Portland, ME 04103
800-639-8805

61 Washington St.
Auburn, ME 04210
800-639-3660

8 ABJ Dr.
Gardiner, ME 04345
866-364-4395

781 Odlin Rd
Bangor, ME 04401
800-639-4556

70 Zachary Rd.
Manchester, NH 03109
800-639-1125

11 Jenna Dr
Gorham, ME 04038
800-287-2225

©2024 K.L. Jack & Co.

All product specifications, information and data in this catalog or made available on the website are subject to change. The customer is responsible for verifying the information provided in this publication is correct. All information given herein is believed to be accurate, but it is presented without guarantee, warranty, or responsibility of any kind, expressed or implied.